

Angle Hose Valve 300 Lb. Rated

A55



- Used with a Fire Hose Rack Assembly, or as a Fire Dept. outlet connection.


DOUBLE FEMALE

Standard equipment:

Female NPT inlet and outlet forged brass valve.
Red hand wheel.

Optional Finishes:

PB
RC
PC

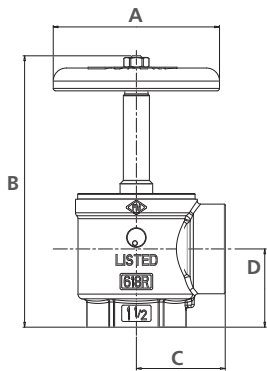

CERTIFICATIONS



a	b
1-1/2"	1-1/2"
2-1/2"	2-1/2"

	1-1/2" x 1-1/2"	2-1/2" x 2-1/2"
A	4-1/64"	5-1/8"
B	7-11/16"	10-9/16"
C	2-9/64"	3-5/32"
D	1-57/64"	2-41/64"

Angle Hose Valve 300 Lb. Rated

A56



- Used with a Fire Hose Rack Assembly, or as a Fire Dept. outlet connection.


FEMALE X MALE

Standard equipment:

Female NPT inlet x male hose thread outlet forged brass valve.
Red hand wheel.

Optional Finishes:

PB
RC
PC

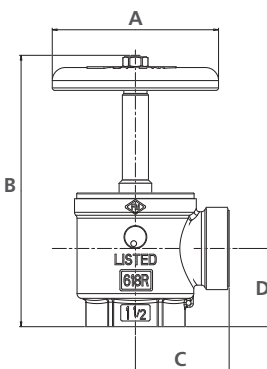

SPECIFY THREAD

CERTIFICATIONS



a	b
1-1/2"	1-1/2"
2-1/2"	2-1/2"

	1-1/2" x 1-1/2"	2-1/2" x 2-1/2"
A	4-1/64"	5-1/8"
B	7-11/16"	10-9/16"
C	2-17/64"	3-3/16"
D	1-57/64"	2-41/64"