




M230i Front

Flexible and reliable front or back labelling

The M-Series Front **i-Tech** units offer flexible and reliable labelling on the front or back of cases and cartons. Delivering both accuracy and speed, they provide you with a trustworthy, robust and easy to use system.

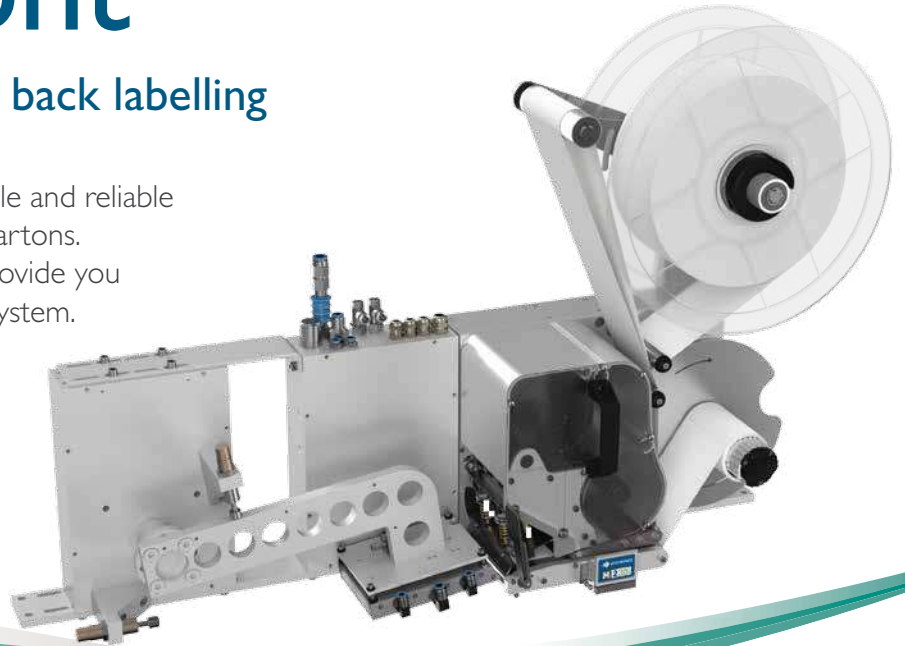

Easy to operate - simple operation and unrivalled capability

- ◆ Clear monitoring & control with optional **TouchPanel** colour user interface
- ◆ Easy navigation and operation with intuitive **QuickStep** software
- ◆ Minimum downtime with tool-free magnetic printhead mounting system & expanding ribbon mandrels

Lower Total Cost of Ownership – reduced cost and increased efficiency

- ◆ Increased printhead life
- ◆ Lower material wastage with full label coverage allowing optimum label size
- ◆ Increased uptime with fast consumable and print head changes

Improved performance - sets the standard for efficiency

- ◆ 600m ribbon & label roll capacity within a compact footprint
- ◆ Increased print speed for reduced cycle times
- ◆ Robust design supports all mounting orientations
- ◆ Supply chain compliance with full GSI coding capability at high resolution including bar codes, text and graphics



Domino. Do more.

Benefits of Front Applicator

- ◆ Flexible, multi-purpose solution
- ◆ Labelling of moving products
- ◆ Accurate and consistent label position
- ◆ Easy and fast consumable changes
- ◆ Front or back labelling
- ◆ Applies last label printed
- ◆ Industrial, robust design
- ◆ Left and right hand versions as standard



Optional **QuickStep** User Interface

For effortless control and status reporting **QuickStep** is our unique, simplified operator interface that gets the printer into action quickly and simply. No complex menus or parameters, just enter the job and away you go.

- ◆ Quick access to favourite menus and settings via large user-friendly icons and customisable home screen.
- ◆ Easy, prompted input of data into label templates.
- ◆ Speed up changeovers and help eliminate coding selection errors with simplified Message Store and live WYSIWYG preview.



Technical Specification:

M230i-FI00 & M230i-FI50

Print technologies:	Thermal Transfer
Print resolutions:	12 dots/mm (300dpi)
Typical speeds:	12-25 labels per min
Label sizes:	Up to 150 x 210mm
Label & ribbon lengths:	600m
Distance to product:	Up to 300mm
Pneumatics:	6 bar compressed air
Communication:	2 x RS232, 1 x USB 2.0, Ethernet
I/Os (configurable):	10 Inputs and 10 Outputs
User interface:	Graphical display with 25 languages
Overall Dimensions:	832 x 614 x 280mm (Printer & Applicator min) 832 x 685 x 318mm (Printer & Applicator max) 406 x 278 x 129mm (Controller - PCU)

Larger labels and longer stroke lengths are available - details on request

