



FIRE PROTECTION PRODUCTS

Straight Two-way Male Outlets

A97




► Used as a standpipe roof outlet connection by the fire service. Provides 250 G.P.M. minimum per outlet. Used with straight or angle hose valves to provide water control

Standard equipment:
Cast brass body with female NPT inlet and male NPT or male hose thread outlets.
Straight connection.

a	b
4"	2-1/2"
6"	2-1/2"

	4" x 2-1/2"	6" x 2-1/2"
A	4-57/64"	5-23/32"
B	6-57/64"	8-5/8"



SPECIFY THREAD

Straight Three-way Male Outlets

A97




► Used as a standpipe roof outlet connection by the fire service. Provides 250 G.P.M. minimum per outlet. Used with straight or angle hose valves to provide water control

Standard equipment:
Cast brass body with female NPT inlet and male NPT or male hose thread outlets.
Straight connection.

a	b
4"	2-1/2"
6"	2-1/2"

	4" x 2-1/2"	6" x 2-1/2"
A	6-21/32"	6-57/64"
B	10-11/16"	10-11/16"
C	5-3/64"	7-3/32"

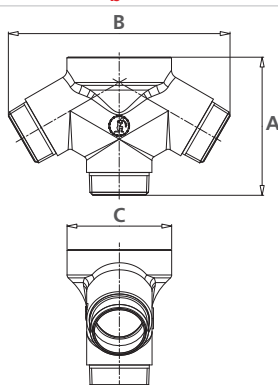

SPECIFY THREAD