


M230i-CW

Reliable and secure labelling

The M-Series Corner Wrap models, **M230i-CW100** and **M230i-CWR100**, are flexible and reliable automated Print & Apply solutions used for labelling over a corner. Both models handle a variety of label sizes whilst minimising its use of production space.

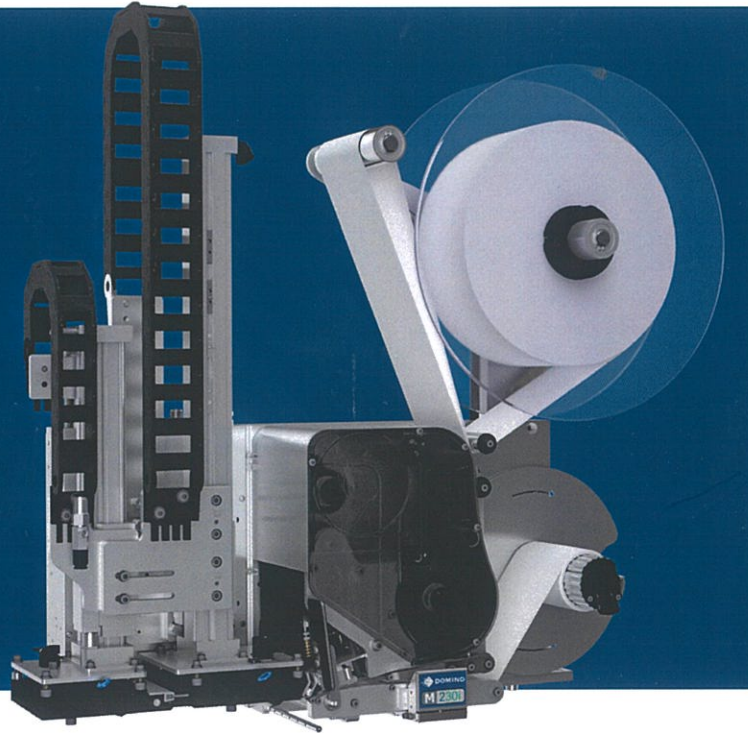

Performance

- ◆ Automatic stroke adaptation to product distances up to 280 mm optimises your throughput.
- ◆ Articulated pad allows for label delivery to product panel variances.
- ◆ Label Check sensor (optional) ensures the label does not get lost, ensuring customer satisfaction for your end user.

Scan with camera
to watch it operate




Maximum uptime

- ◆ 600 m ribbon & label roll capacity within a compact footprint.
- ◆ Unique pad design allows for any label variation without changeover.
- ◆ Easy to change long life thermal print heads.

Simple operation

- ◆ Clear monitoring & control with optional **TouchPanel** colour user interface.
- ◆ Robust design with left and right models to meet the best operating position.
- ◆ Simple preventative maintenance access points.



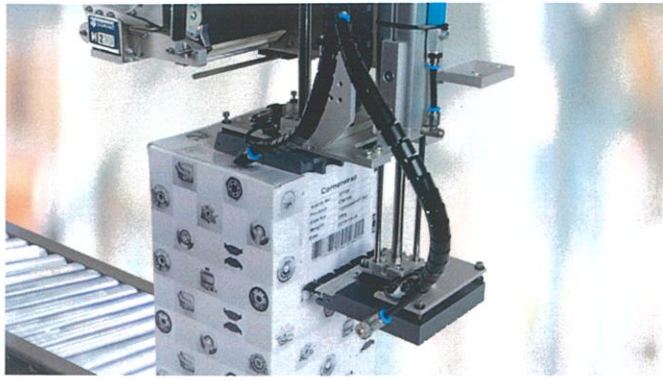

Accurate label placement

The unique dual pad design ensures label placement accuracy to facilitate consistent downstream barcode reading, with the ability to handle variable label sizes.

M-Series also offers a reversed model, **M230i-CWR**, in order to achieve the best operator comfort and an optimal implementation of the system to your production line.



Optional *TouchPanel* User Interface

For effortless control and status reporting *TouchPanel* is our unique, simplified operator interface that gets the printer into action quickly and simply. No complex menus or parameters, just enter the job and away you go.

- ◆ Quick access to favourite menus and settings via large user-friendly icons and customisable home screen.
- ◆ Easy prompted input of data into label templates.
- ◆ Speed up changeovers and help eliminate coding selection errors with simplified message store and live WYSIWYG preview.

Technical Specification


For labelling over a corner, the **M230i-CW** or **M230i-CWR** can be configured to suit your specific needs. All M-Series units are equipped with a powerful Printer Control Unit (PCU).

	M230i-CW100	M230i-CWR100
Print width	108 mm (4")	162 mm (6")
Print technology	Thermal Transfer / Direct Thermal	
Resolution	12 dots/mm (300dpi)	
Orientation	Left hand or Right hand	
Label & Ribbon lengths	Up to 600 m	
Typical capacity	12 labels/min	12 labels/min
Distance to product (to center of pad)	Up to 280mm	
Label sizes (WxL)	75x150* mm - 110-254* mm *Corner wrap applications	
Dimensions (HxWxL)	654 x 262 x 715 mm	654 x 262 x 716 mm

M230i-CW100



M230i-CWR100

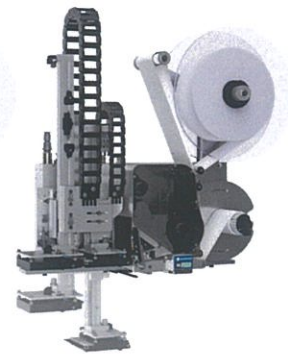

	PCU
Communication	2xRS232, 1xUSB 2.0, Ethernet
I/Os (configurable)	10 Inputs and 10 Outputs
User interface	Graphical display with 25 languages
Dimensions (HxWxL)	130 x 280 x 405 mm



www.domino-printing.com