


# M230i-FS

## Two side labelling from a single printer applicator

The **M230i-FS100** and **M230i-FS150** provide you with a flexible, multi-purpose labelling unit that are specially designed for versatile and reliable labelling on two sides of a case or carton. Delivering both accuracy and speed, they provide you with a trustworthy, robust and easy to use system. Experience consistent labelling for many years to come – even in the harshest industrial environments.

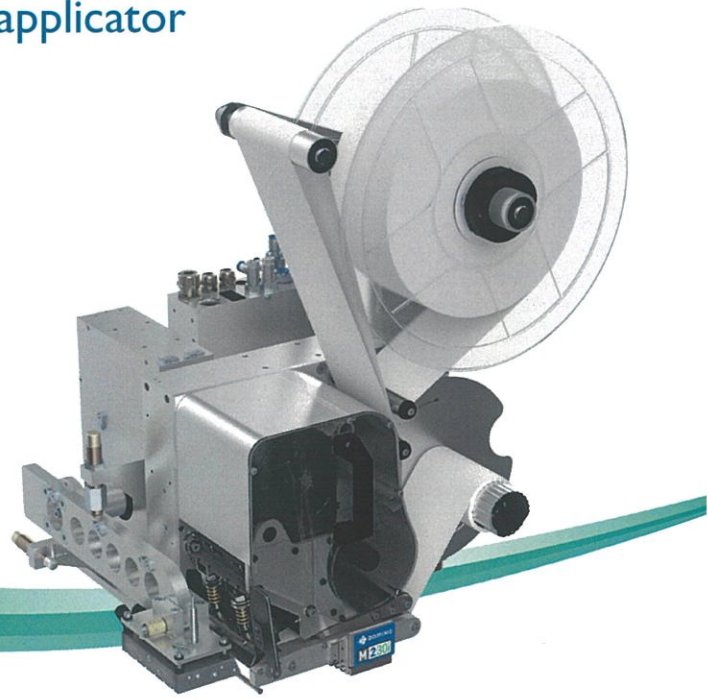

### Easy to operate - simple operation and unrivalled capability

- ◆ Clear monitoring & control with optional **TouchPanel** colour user interface
- ◆ Easy navigation and operation with intuitive **QuickStep** software
- ◆ Minimum downtime with tool-free magnetic printhead mounting system & expanding ribbon mandrels

### Lower Total Cost of Ownership – reduced cost and increased efficiency

- ◆ Increased printhead life
- ◆ Lower material wastage with full label coverage allowing optimum label size
- ◆ Increased uptime with fast consumable and print head changes

### Improved performance - sets the standard for efficiency

- ◆ 600m ribbon & label roll capacity within a compact footprint
- ◆ Increased print speed for reduced cycle times
- ◆ Robust design supports all mounting orientations
- ◆ Supply chain compliance with full GS1 coding capability at high resolution including bar codes, text and graphics

SO-SAL-3200-049

**Domino. Do more.**



## Benefits of M230i-FS Applicator

- ◆ Flexible, multi-purpose two side labelling solution
- ◆ Labelling of moving products
- ◆ Accurate and consistent label position
- ◆ Easy and fast consumable changes
- ◆ Front-side, back-side, top-front or top-back labelling
- ◆ Applies last label printed
- ◆ Industrial, robust design
- ◆ Left and right hand versions as standard

## Optional QuickStep User Interface

For effortless control and status reporting **QuickStep** is our unique, simplified operator interface that gets the printer into action quickly and simply. No complex menus or parameters, just enter the job and away you go.

- ◆ Quick access to favourite menus and settings via large user-friendly icons and customisable home screen.
- ◆ Easy, prompted input of data into label templates.
- ◆ Speed up changeovers and help eliminate coding selection errors with simplified Message Store and live WYSIWYG preview.



## Technical Specification:

Print technology:	Thermal Transfer
Print resolution:	12 dots/mm (300dpi)
Typical speeds:	2 x 12 labels per min
Label sizes:	Up to 150 x 110mm
Label & ribbon lengths:	600m
Distance to product:	Up to 90mm
Pneumatics:	6 bar compressed air
Communication:	2 x RS232, 1 x USB 2.0, Ethernet
I/Os (configurable):	10 Inputs and 10 Outputs
User interface:	Graphical display with 25 languages
Overall Dimensions:	581 x 629 x 477mm (Printer & Applicator min)
(L x H x W)	581 x 629 x 532mm (Printer & Applicator max)
	406 x 129 x 278mm (Controller - PCU)



[www.domino-printing.com](http://www.domino-printing.com)

M230i Front-Side/0917 We reserve the right to change the design or specification of our products without notice. Some of the information contained in this brochure is general in nature and customers should check that it is applicable to their individual circumstances.

ต้นฉบับควบคุม	
วันที่เริ่มใช้	1 / 8 / 66
ผู้จัดทำ	อัครา นิมล
	20 / 7 / 66
ผู้อนุมัติใช้	[Signature]
	10 / 7 / 66